


Atrust




Zero Client Atrust m202

Atrust m202 is a zero client designed as an endpoint of a shared resource system, especially a MultiPoint Server system. The MultiPoint Server system is a new shared resource solution using Windows MultiPoint Server 2011 as its core technology. The solution enables a host server to power multiple and independent stations. Each station only consists of one station hub (zero client) with a keyboard, mouse, and monitor connected, allowing multiple users to share the computing power of one single server. The server provides each station user with familiar and independent Windows experience through a simple USB connection.

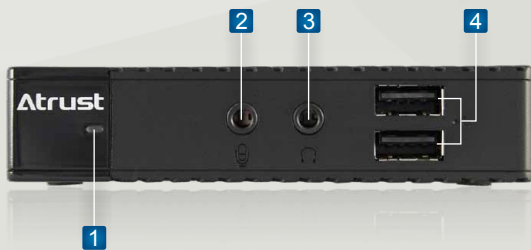

- 1 Power LED**
Indicates the status of electricity supply.
- 2 Microphone Socket**
Connects to a microphone or a digital musical instrument such as a MIDI keyboard.
- 3 Headphone Socket**
Connects to a headphone or a speaker system.
- 4 USB Port**
Connects to a USB device.
- 5 AC Adaptor Socket**
Connects to an AC adaptor.

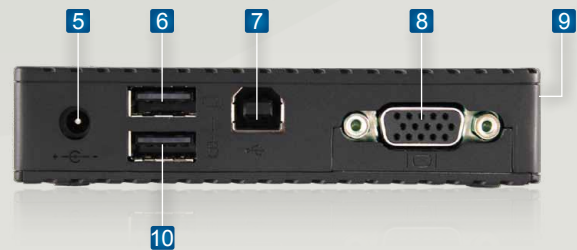

- 6 USB Port**
Connects to a mouse.
- 7 USB Port**
Connects to the host server.
- 8 VGA Port**
Connects to a monitor.
- 9 Kensington Lock Slot**
Attach the m202 to a permanent object with the Kensington slot and a security cable.
- 10 USB Port**
Connects to a keyboard.

Atrust m202 Feature

- ▶ **Low total cost of ownership**
Additional computing access is as simple as adding more I/O devices. The total cost of ownership is then drastically reduced.
- ▶ **Slim and quiet design**
m202 is feather light weighing only 94g. The slim design allows it to be mounted to the back of a monitor with a VESA mount. Together with its fanless design, m202 helps create a simple and noiseless workplace environment.
- ▶ **Extra USB ports**
m202 is equipped with two extra USB ports for additional USB devices.
- ▶ **Simple plug and play setup**
Just attach a keyboard, mouse, and monitor to your m202,



and then connect it to the host server. A station is set up easily and ready for use right away.

- ▶ **Easy management and maintenance**
Since all computing tasks are performed on a server, all hardware and software issues are gone on the client side. All user management, software installations, system management, and upgrades are done on a single server.

System	m202
Processor	DL-125
Graphics	Supports up to 1280*1024 / 1440*900
Video	VGA-type video output (D-sub 15)
I/O ports	1 x VGA 1 x USB B type to host 2 x USB A type for Keyboard/Mouse 2 x USB A type for other USB devices 1 x headphone 1 x MIC 1 x power jack 1 x Kensington lock slot
Networking	Host connection USB2.0
USB cable	USB cable with B type connector
Dimension	(W) 100 x (H) 23 x (D) 66mm
Weight	94g (approximate, AC Adaptor excluded)
Operating temperature	0°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
Cooling	Fanless
Operating noise	No noise
AC adaptor	Input: 100 ~ 240 VAC / +5V DC , 50 ~60Hz Output: 2A
Server OS Support	Windows MultiPoint Server 2011
Regulatory	CB, FCC, CE, BSMI, NRTL
Compliance	WEEE, RoHS
Option	VESA Mount Kit (W) 114 x (H) 6 x (D) 60 mm 2 meters USB cable for Host connection 3 meters USB cable for Host connection 5 meters USB cable for Host connection
Available Date	The m202 is now available.

© 2011 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. To learn more, visit www.Atrustcorp.com.

2011 V.01