

# MiniPC G230



## PROFILE

G230 , based on Intel Baytrail Quad core CPU, it supports Windows 10 and Android 5.1 dual OS.  
Palm-size, with fan-less design.

## FEATURES

### Standard Windows10

Standard Windows 10 OS supported. Thousands of application could be installed easily.

### Multiple VDI Support

Supports Microsoft RDP, Citrix ICA and VMware (RDP) protocols and offers smooth user experiences.

### Internal WIFI+BT supports (Optional)

G230 supports build-in WIFI and Bluetooth

### Convenient Management



Supports centralized management with Microsoft SCCM management software

### Compact, Flexible & secure

Fan-less design, Palm size VESA mountable.



## I/O ports

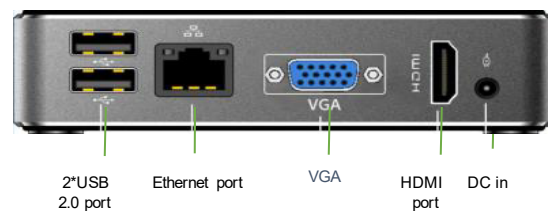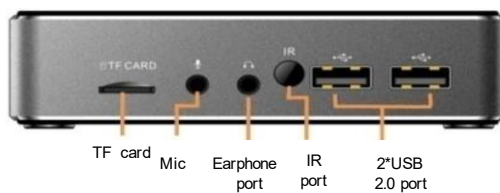

SYSTEM	
Processor	Intel Baytrail Dual core N2807/J1800 Dual core
Available Operating System	Windows 10 home edition / Android 5.1
VDI/HSD Support	Citrix Receiver / VMware Horizon view / Microsoft RDP
Management	Microsoft SCCM
MEMORY	
RAM (DDR3)	4G SO-DIMM DDR3L 1600 MHz memory (MAX 8G optional)
Storage (ROM)	64G mSATA (MAX 128G optional)
DISPLAY	
Port	VGA x 1 HDMI x 1
Resolution	VGA up to 1920x1200@60Hz HDMI up to 1920x1080@60Hz
Color Depth	32bit true color
Dual Display	Supported (VGA + HDMI)
Network	
LAN	x1 (10/100/1000 Mbps Base-T Fast Ethernet, RJ-45)
WLAN	WI-FI 802.11 b/g/n & BT 4.0 ( build-in optional)
I/O PERIPHERAL INTERFACE	
USB 2.0	x2 (front), x2 (rear)
RJ-45	x 1
AUDIO	
Line-out	x1 (1/8-inch mini-jack, 16-bit stereo)
Mic-in	x1(1/8-inch mini-jack, 16-bit stereo microphone)
DIMENSION	
Device	107mm*107mm*27.5mm
Packaging	140mm*140mm*70mm
N.W.	0.2 kg
G.W.	0.5 kg
Power	
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 5V/3A DC
Power Consumption	Standby mode: 3.0w, Full load mode: 8.0w
ENVIRONMENT	
Cooling	Fan-less Convection
Operation Temperature	-10°C to 40°C
Relative Humidity	30% to 80% non-condensing